


eurogan

Tubo Delta 2 Alas "Plus" 2 Wings "Plus" Pipe

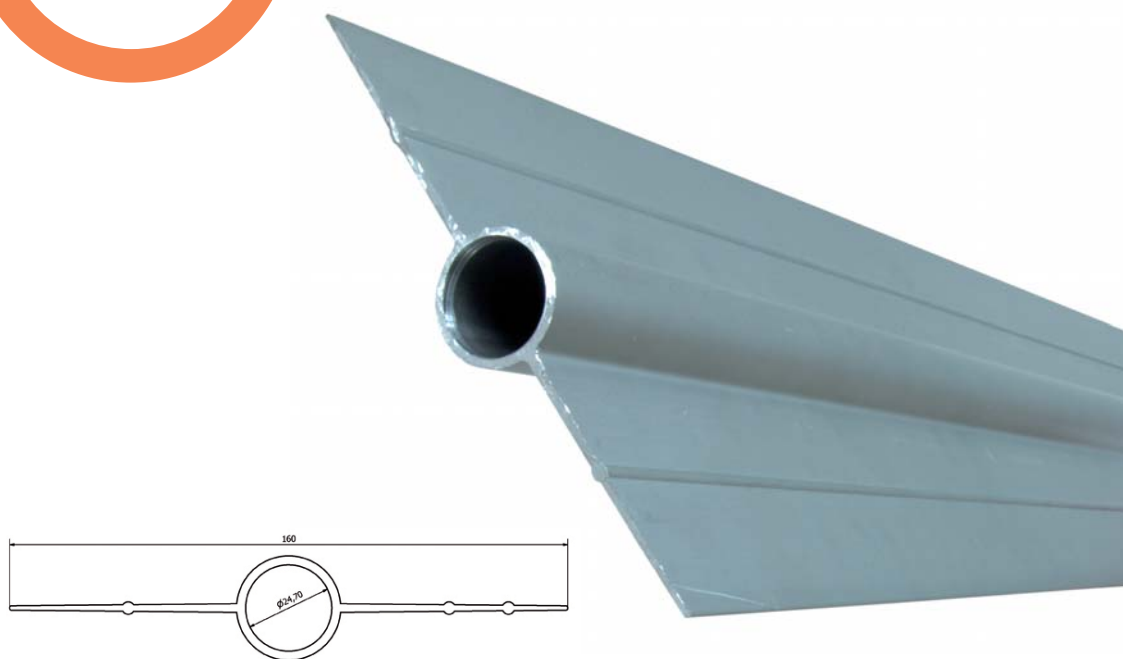

CARACTERÍSTICAS TÉCNICAS


- Fácil y económica instalación sin roscas
- Gran transmisión de calor
- Aluminio extrusionado y anodizado de 16 micras
- Aleación: Aluminio 6360-H56
- Se sirve en barras de 6 mts (posibilidad de cortar a medida)
- Cálculo aproximado según zonas climáticas y nivel de aislamiento de granja. 0.35m lineales por lechón
- Potencia calorífica: 255Kcal/h. Por metro lineal
- Composición química (%): Si: 0.43- FE: 0.18- CU: 0.01- MN: 0.03- MG: 0.47 - ZN: 0.01 - TI: 0.01
- Tratamiento térmico: Templado en horno, (T5)
- Dureza: 10/14 Webster
- Tolerancia: Según normas UNE:38-066-74

TECHNIC CHARACTERISTICS

- No threads, simple and economic installation
- Large heat transmission
- Extruded and anodized 16 microns aluminum
- Alignment: Aluminum 6360-H56
- Is served in bars of 6 m (Possible custom cut)
- Estimate calculation according to climatic zones and insulating level of farm
- Caloric power: 255Kcal/h. Per linear meter
- Chemical composition (%):Si: 0.43- FE: 0.18- CU: 0.01- MN: 0.03 -MG: 0.47 - ZN: 0.01 - TI: 0.01
- Heat treatment: Warm en oven, (T5)
- Hardness: 10/14 Webster
- Tolerance according UNE Standard: 38-066-74

Racores / Joints

Racor doble /
Double connector Delta



Ref: 332123

Racor final de línea Ø22 mm /
Joint Delta end of line Ø22 mm



Ref: 332126

Soportes / Supports

Soporte tubo Delta 2 alas "Plus" /
Delta pipe support 2 wings "Plus"



Ref: 332130

Grupillas / Connecting flats

Grupilla para racor final "Plus" /
Circlip for 2 wings "Plus" pipe



Ref: 332120

Accesorios de conexión / Connection accessories

Codo Ø22 mm / Delta pipe 90° bend Ø22 mm



Ref: 332125

Manguito recto Ø22 mm / Straight sleeve Ø22 mm



Ref: 332119

-Tubo multicapa / Multilayer tube Ø22 mm Ref: 332127

-Te Ø22 / TE Ø22 / 22 / 22

Ref: 332122

Montaje / Assembly

